


Datenblatt für Artikel: LID17400--

7829A/EW LED STRIP 24V DC EW 5m ROLL

9,6W/m IP20

LED Flexstrip, dimmbar, 5 Meter Rolle

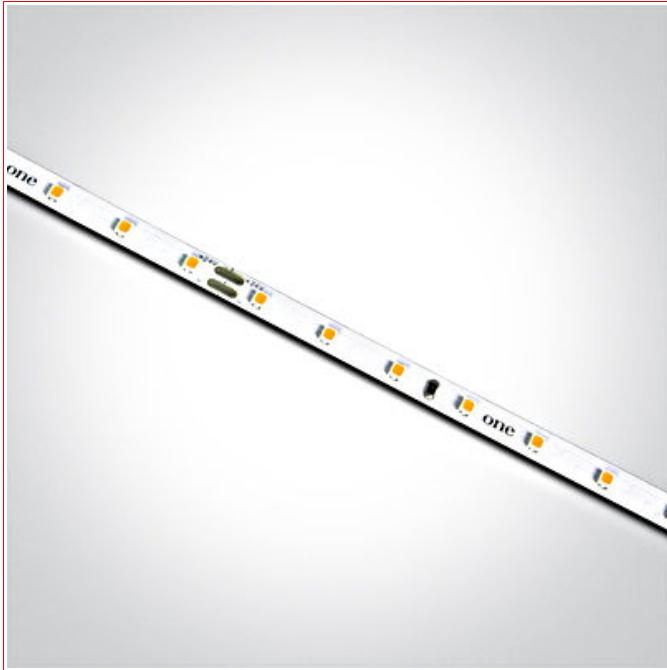

Produktinfo

Flexible LED strip with SMD2835 LEDs, 70LEDs/m, 9,6W/m. Supplied in 5 meters roll with 3M double face adhesive tape. Can be cut every 10cm (7-LED segment). Requires 24V DC constant voltage LED driver. Complies with standard EN60598-1 and any other specific standards.

Technische Daten

Nettolänge (mm)	5.000,00
Nettobreite (mm)	8,00
Leuchtenart	LED Strip
Montage	Deckenanbau Wandanbau Bodenanbau
Betriebsgerät	Muss separat bestellt werden
Betriebsspannung DC (V)	24
Eingangsspannung DC (V)	24
Fassung	LED Platine
Systemeffizienz (lm/W)	80
Lichtfarbe	warmweiß

Technische Daten - Fortsetzung

Farbtemperatur (K)	2700
Farbwiedergabeindex Ra	≥90
Lichtstrom/m (lm/m)	768
Dimmbar	Abhängig vom Treiber ja
Schutzklasse	III
Schutzart	IP20
Energieeffizienzklasse	F
Leuchtmittel inkl.	ja

Maßbild: 7829A/EW LED STRIP 24V DC EW 5m ROLL 9,6W/m IP20

Cut every 10cm
(7-LED segment)



BEZEICHNUNG	BEST.NR.
7829A/EW LED STRIP 24V DC EW 5m ROLL 9,6W/m IP20	LID17400
LED Flexstrip, dimmbar, 5 Meter Rolle	